


Screw thread cylinder

Specification:


Mode	6	8	10	16
Motion	Single acting type			
Fluit	Air			
Operating pressure range(Mpa)	5,10,15			
Stroke	0.2~0.8			
Ambient temperature(°C)	-10~60			
Portsize	M5 × 0.8			




How to order:

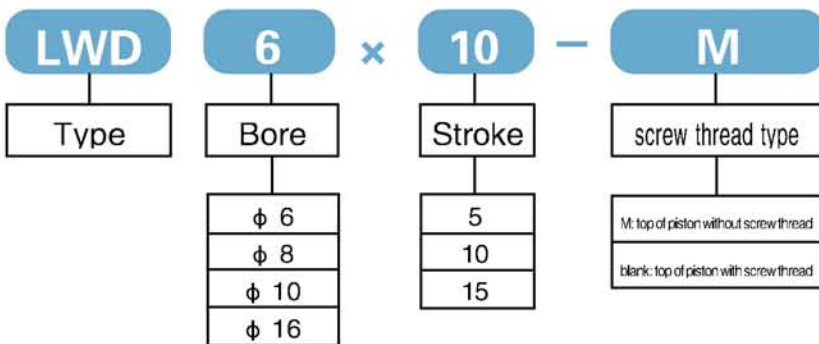

Inner structure drawing:

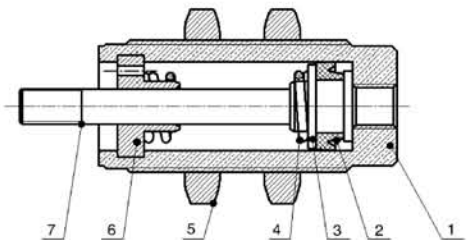

Dimension:

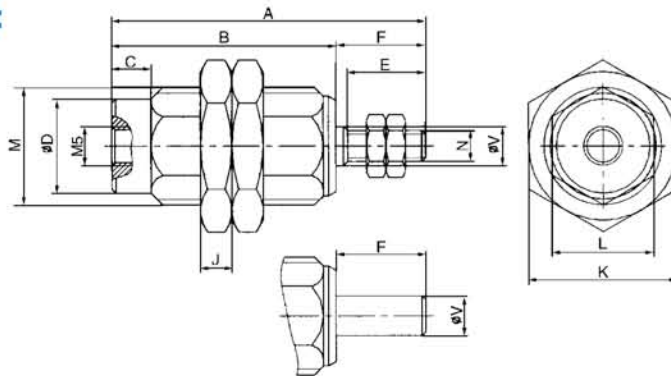

①	Cu tube with nickel
②	NBR Y -ring
③	AL piston
④	Stainless steel spring
⑤	steel screw cap with nickel
⑥	Cu axial with nickel
⑦	Stainless steel piston rod

Bore	A	B	C	D	E	F	J	K	L	M	N	V
LWD6 × 5	29.5	21	4	8.5	7	8.5	3	14	9	M10 × 1	M3 × 0.5	3
LWD6 × 10	34.5	26	4	8.5	7	8.5	3	14	9	M10 × 1	M3 × 0.5	3
LWD6 × 15	41.5	33	4	8.5	7	8.5	3	14	9	M10 × 1	M3 × 0.5	3
LWD8 × 5	31	21	4	10	7	10	3.2	14	11	M12 × 1	M4 × 0.7	5
LWD8 × 10	39	29	4	10	7	10	3.2	14	11	M12 × 1	M4 × 0.7	5
LWD8 × 15	44	34	4	10	7	10	3.2	14	11	M12 × 1	M4 × 0.7	5
LWD10 × 5	35	23.5	5	12	10	11.5	4	19	13	M15 × 1.5	M4 × 0.7	5
LWD10 × 10	40	28.5	5	12	10	11.5	4	19	13	M15 × 1.5	M4 × 0.7	5
LWD10 × 15	47	35.5	5	12	10	11.5	4	19	13	M15 × 1.5	M4 × 0.7	5
LWD16 × 5	38	23	7	19.5	12	15	5	27	20	M22 × 1.5	M5 × 0.8	6
LWD16 × 10	48.5	33.5	7	19.5	12	15	5	27	20	M22 × 1.5	M5 × 0.8	6
LWD16 × 15	53.5	38.5	7	19.5	12	15	5	27	20	M22 × 1.5	M5 × 0.8	6